

Fact Sheet

CWHmaxx 6000

BIZERBA

Our clean solution for fully automatic weight control – the dynamic checkweigher CWHmaxx. It was specifically developed for high demands of the food industry. The hygienic design impresses in terms of quality of the materials used, open structures and rounded surfaces. Your benefit: An easy to clean checkweigher for food with precise weighing results.



More informationen
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Weighing data	Weighing Range: 3000 g 6000 g Scale interval d: 1 g 2 g Verification scale interval e: 1 g 2 g Minimum load: 150 g	
Performance data	Max. throughput: 300 packages per min. Max. belt speed: 79 - 120 m/min min. belt speed: 5 m/min	Depending on length of weighing conveyor
Device version / material	Stainless steel	1.4301
Operating panel	12.1" SVGA color touch screen	
Interfaces	USB, EDP 1, 8 inputs, 8 outputs, Ethernet	EDP 1 (RS 232 or RS 422 or TTY)
Protection type	IP65	Conveying unit, control cabinet, display
Transport	Transport direction Transport height	Left to right right to left 750 - 1000 mm
Conveyor belt	Belt width: 300 mm Belt lengths: Weighing belt lengths: 400 - 600 mm Infeed belt lengths: 400 - 600 mm Discharge belt lengths: 400 - 1250 mm Belt colors: white and blue Roller diameter: 32 mm Belt body and quick belt change system	Length specifications always as axle distance: 400, 500, 600 mm 400, 500, 600 mm 400, 500, 600, 750, 1000, 1250 mm white as a standard and blue optionally available Rollers made of aluminum, surface hard coated
Ambient conditions	Operating temperature Humidity	0 °C to +40 °C 20 - 90%, non-condensing
Energy supply	Power supply Power consumption Compressed air supply	100 - 240 V, 50/60 Hz 500/750 VA 6 bar
Software licenses	STATISTICS WEIGHT_CLASSES	To create statistics To classify up to 80 products
Software variants	Software Codepage Software UNICODE	Data transfer (texts & strings) Data transfer (texts & strings) in UTF-8 coding
further characteristics	Article memory Weight classes Remote service Web interface Sending of status e-mails	100,000 80
Options	Facts	Details
Metrologically approved as per OIML R 87	Prepack regulations (FPV) control	The checkweighers are metrologically approved as per accuracy class XIII (1) and therefore suitable for prepack regulations control.

Metal detector	Integrated metal detector Metal detector belt length	The metal detector is operated from the display of the checkweigher. 750 1000 mm
Operating panel	7" color display with membrane keyboard	WVGA (800 x 480)
Indexing belt length	400, 500, 600 mm	Shaft distance
Rejection systems	Air-jet nozzle Pusher	Further rejection systems upon request as a project
Reject bin	Stainless steel Dimensions (L x D x H)	150 200 300 400 x 300 x 750 mm, Opening 200 mm 250 350 500 x 310 410 x 750 mm, Opening 250 mm
	Container fill level check Rejection control Lock for reject bin Door monitoring	Light sensors 1 light sensor or 4 light sensors available as latch or lock stops the system when the reject bin door is open after expiration of an adjustable time
Protocol printer	mounted to control cabinet	incl. license LINE_PRINTER and serial interface
Emergency stop	Emergency stop with belt switch-off Emergency stop with pneumatic system and belt switch-off	mounted to main column, turns off belt drives additionally switches off the pneumatic system
Signal lamp	2-color 3-color	red = fault, green = device okay red = fault, yellow = stop, green = belts running
Emergency operation function	The conveyor belts of the checkweighers can be started manually even if the operating and control unit failed.	The belts run in order to ensure the production flow (without weighing function). Operation via extra module in the control cabinet with adjustable belt speeds.
Tendency control kit	Incl. license Tendency Control and relay	
Line integration kit	3 outputs via relay and 1 input	
Flow control	Light sensor	
Draft shield	from the top	reduces interfering influences resulting from drafts
Guide rails	available for all belt lengths	
Belt transition plates	available for all belt lengths	closes the gaps between the belt bodies
Compressed air monitoring	stops the system when air pressure drops	
Software licenses	BRIDGE+MC_BUFFER EICHFÄHIG_X1 ETHERNET ONLINE SOFTCONTROL TENDENCY CONTROL LINE_PRINTER	for buffering data in the event of LAN / pc failure as per prepack regulations, incl. conformity assessment Ethernet connection via TCP/IP communication via Gx-Net via ETHERNET for operation from a second work station to regulate filling systems (without relay) required for external printer



Symbols



300 packages per minute



Protection Class IP65



Unicode




e (metrologically approved)



Stainless Steel






Strain gauge



Hygienic Design

Dimensions

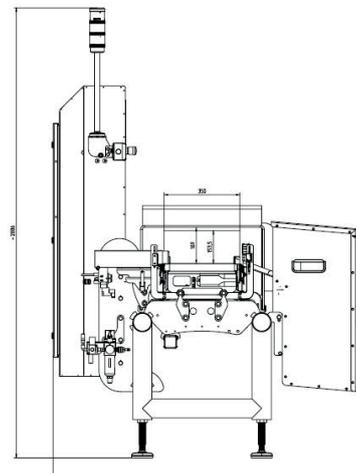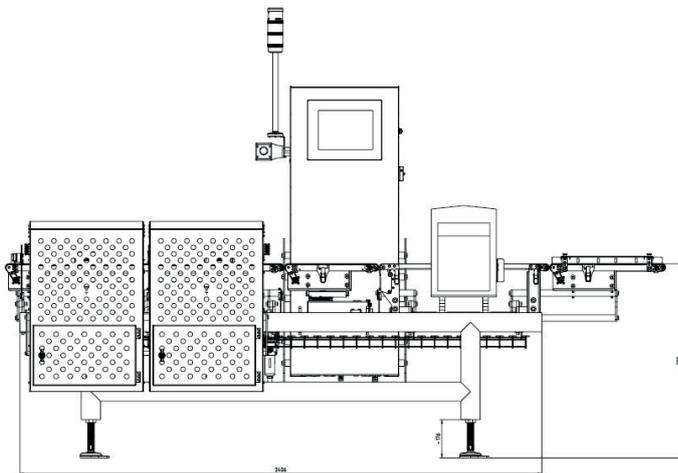

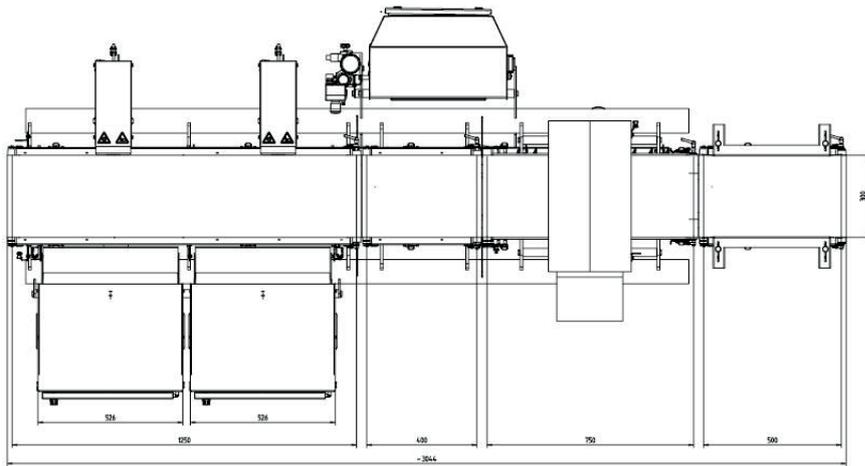

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen
Germany

T +49 7433 12-0
F +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com