

Fact Sheet

GLM-Bmaxx 150F / 350 / 700

BIZERBA

GLM-Bmaxx ... simply a better experience with every label ... The automatic Bizerba weigh price labeler GLM-Bmaxx makes things easy for you: It can be easily integrated into conveyor systems and data systems and thus ensures correct labeling from the case to the pallet. And with the Intel® Atom™ it fulfils both current and future requirements.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Printing technology	Printing process Resolution Print width Print speed Label output	Thermal direct (optionally thermal transfer) 8 dot/mm (optional 12 dot/mm) 80 mm (optional 104, 168 mm) max. 250 mm/s 120 mm (optional 170 mm)
Printer	Label size Label roll Thermal transfer ribbon	min. 52 mm (W) x 74 mm (L), DIN A8 max. 148 mm (W) x 210 mm (L), DIN A5 Core 76 mm, outer diameter max. 300 mm Core diameter 25.4 mm Outer diameter 81 mm
Applicator	GLM-Bmaxx 150F GLM-Bmaxx 350S/T GLM-Bmaxx 700S/T	Tamp-blow or piston applicator for label application to front or sides, swing arm length 150 mm Tamp-blow or piston applicator for label application to top or sides, stroke length 350 mm Tamp-blow or piston applicator for label application to top or sides, stroke length 700 mm
Barcode versions	All standard barcodes	EAN/UPC 8, EAN/UPC 13, EAN/UPC 128, Code 2/5 int. Code 39, Code 128, GS1-128, PDF 417, PDF 417 with AI, GS1 DataBar Omni, GS1 DataBar, Data Matrix, QR code
Supply voltage	230 V / 50-60 Hz, 110 V / 60 Hz	
Interfaces	Ethernet TCP/IP optionally RS232, RS422, TTY	
Operating temperature	0 °C to 40 °C	Standby to -10 °C
Humidity	20 - 90%, non-condensing	
Protection type	IP20	
Memory	2 GB	Compact Flash card
Operating panel	Operation via keyboard 7" color display	Optional GT-12E or GT-12C with 12" LCD touch display
Options	Facts	Details
Thermal transfer device		Printing is done via thermal transfer ribbon
Windows printer driver		Application management
ZPL2 converter		Application management

Infographic



GLM-Bmaxx 150F




GLM-Bmaxx 350S




GLM-Bmaxx 700T

Symbols


Dimensions

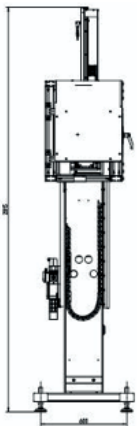

GLM-Bmaxx 150F



GLM-Bmaxx 350S



GLM-Bmaxx 700T

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen
Germany
T +49 7433 12-0
F +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com