

Fact Sheet

GLM-Emaxx 20/30/WS

BIZERBA

GLM-E maxx 20/30/WS ... more features, more convenience, more functionality. Whether as an automatic labeling system with manual loading or in combination with a packaging machine, this system fulfils both current and future requirements with its Intel® Atom™ based hardware.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Weighing ranges	6 kg 3/6 kg	Verification scale interval 2 g, min. FPV 500 g Verification scale interval 1/2 g, min. FPV 150 g
Conveyor belt dimensions	300 mm x 400 mm (W x L)	for 3/6 kg, 6 kg scales
Printing technology	Printing process Resolution print width Print speed Label output	Thermal direct (optional thermal transfer) 8 dot/mm (optional 12 dot/mm) 80 mm (optional 104 mm) max. 250 mm/s 120 mm
Labeler	Label size Label roll Thermal transfer ribbon	min. W 30 mm x 30 mm to W 100 mm x 100 mm Core diameter 76 mm (optionally 40 mm) Outer diameter 300 mm Core diameter 25.4 mm Outer diameter 81 mm
Labeling technology	Air-jet labeler	Compressed air supply 6 bar, for top labeler
Labeler setting	Height adjustment Transverse adjustment	Manual Optionally (manually)
Package size	max. 300 mm x 400 mm x 250 mm (W x L x H)	
Labeling capacity	max. 35 packages/min.	Depending on device version, weight, package type and label size Weighing and labeling in start/stop mode
Barcode versions	all common barcode versions	EAN/UPC 8, EAN/UPC 13, EAN/UPC 128, Code 2/5 int. Code 39, Code 128, GS1-128, PDF417, PDF 417 with AI, GS1 DataBar Omni, GS1 DataBar, Data Matrix, QR code
Supply voltage	230 V / 50 Hz (120 V / 60 Hz)	One-phase
Operating temperature	0 °C to 40 °C	Standby to -10°C
Humidity	20 - 90%, non-condensing	
Protection type	IP 20 IP 54	Printer Scale, transport, control cabinet
Memory	2 GB	Compact Flash card
Operating panel	Operation via keyboard 7" color display	Optional 12" LCD display with touch screen function

Options**Facts****Details****Alignment rails**

For infeed belt

Package rejection device

Flap, max. product height 150 mm

Transverse adjustment Manual transverse adjustment - labeler**Infographic****Symbols**

Protection class IP65



Protection class IP20





Without tools





WS Food



Unicode

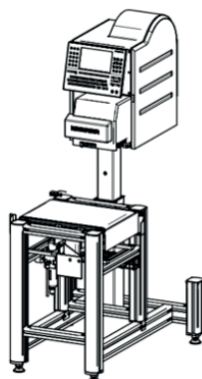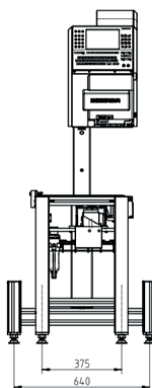Dimensions

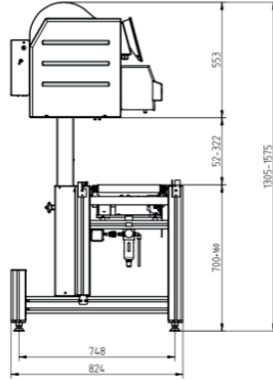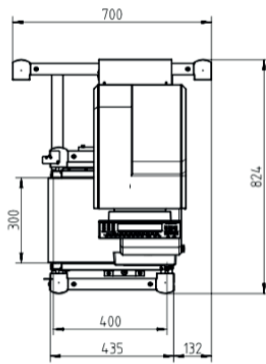

Bizerba GmbH & Co. KG

Wilhelm-Kraut-Straße 65
72336 Balingen
Germany
T +49 7433 12-0
F +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com