

Fact Sheet

BIZERBA

KH II 400 Pro; KH II 400

Modern PC technology allowing you to be totally flexible is what the K-Class II Pro series stands for. Enjoy more performance due to a large RAM. All models are provided with a powerful Intel® Quad Core processor. Ideally suitable to implement new features or individual requirements. With their attractive design these solutions also ideally integrate in your shop concept from an optical point of view.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Variants	KH II 400 Pro 7" KH II 400 Pro 12.1"	with 7" customer display with 12.1" customer display
Color	Anthracite gray Signal white	RAL 7016 RAL 9003
Operator display	12.1" touch TFT	Resolution: 800 x 600 Optionally in combination with RIK: 1,024 x 768 LED backlit Resistive 5-wire touch technology Infinitely adjustable viewing angle
Customer display	7" TFT 12.1" TFT	Resolution: 800 x 480 Resolution: 800 x 600 Optionally in combination with RIK: 1,024 x 768 LED backlit Infinitely adjustable viewing angle
Operating system	Windows 10 IoT Enterprise 2016 LTSC BIZLPOS3 OpenSuse® ≥ 42.1 Leap Kernel 4.2	64 bit Windows 64 bit Linux
Scale software	RetailPowerScale RIK (RetailIntegratorsKit)	Bizerba scale software, compatible with Retail-Framework products 3rd-party software
Processor	Intel® Celeron® Processor N3160 Quad Core	Clock rate of up to 2.24 GHz L2 cache: 2 MB Instruction set: 64 bit Integrated graphics card: Intel® HD Graphics 400
Working memory	DDR3L RAM	4 GB, optionally 8 GB
Mass memory	SSD	60 GB, optionally 120 GB
Printer	3" receipt / linerless printer 3" label printer Dual printer 2" receipt + 2" linerless Dual printer 2" receipt + 3" label	up to 3"/80 mm paper width, 200 dpi print speed up to 150 mm/s, depending on the paper used optional dual printer
External additional printer	Usage of the Bizerba power supply unit RSP 28 allows to use the following printers of the K-Flex series as external additional printer.	KF 3" receipt / linerless printer KF 3" label printer KF 2" L Compact receipt / linerless printer
Interfaces	2 x USB 3.0	Super speed

	2 x USB 2.0 1 x COM LAN	High speed DSUB RJ45, GBit LAN
Weighing ranges	3/6 kg 6/15 kg	Interval 1/2 g, min. 20 g Interval 2/5 g, min. 40 g
Temperature range	-10 °C to +40 °C	
Power consumption	In stand-by 3.8 W During operation typically 26 W to 31 W	Energy saving thanks to use of Wake on LAN Depending on the version
Net weight of device	KH II 400 Pro approx. 18 kg	

Options	Facts	Details
Software extensions	RetailApps Software modules: Cash register, scanning, e-cash, inventory, delivery note, proof of origin, time registration, video journal, Retail-Connect	Extra software function per RetailApps Extra software functions per module
WLAN modules	BWLC USB	Bizerba Wireless LAN Client 802.11 a/b/g/n max. 300 MBit/s USB WLAN stick, no floating sales mode possible 802.11 a/b/g/n max. 300 MBit/s
Cash register drawer connection and 2nd COM	Cash register drawer connection in combination with second COM interface: RS232	RJ12, max. 2 cash register drawers possible with an adapter

Info graphics



Symbols



Java Powered




Linux 64 bit




Windows 10


Dimensional drawings

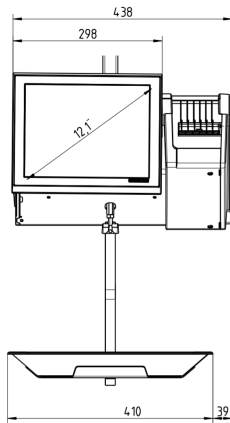


KH II 400 Pro

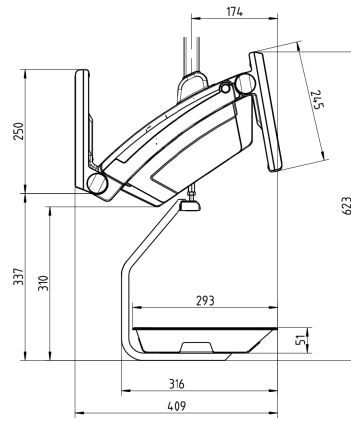


KH II 400

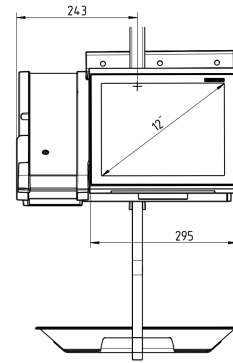


KH II 400 Pro

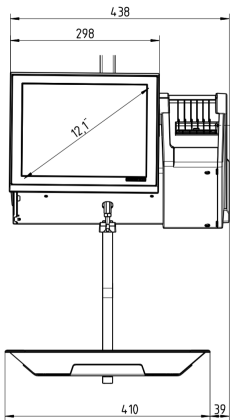

KH II 400 Pro

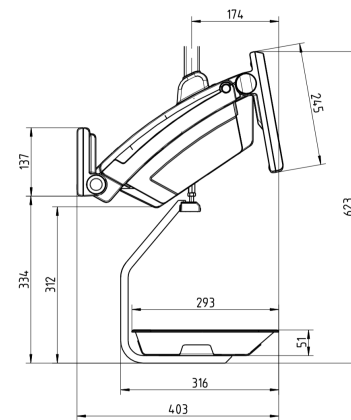

KH II 400

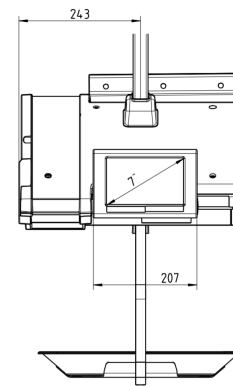

KH II 400 Pro

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

T +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com