

Fact Sheet

BIZERBA

VSV

Ergonomics, hygiene and safety at the highest level: Manual vertical slicer VSV sets international standards on many levels. Benefit from a strong price-performance ratio, top quality materials and workmanship as well as robust and reliable performance. Allrounder VSV is perfectly suitable for all requirements in food service and trade.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Dimensions		
Outer dimensions L x W x H	628 x 531 x 464 mm	330, standard
	24.7" x 20.9" x 18.3"	330, model with portion scale
Footprint L1 x W1	455 x 395 mm	330, standard and model with portion scale
	17.9" x 15.9"	
Work area L2 x W2 x H2	679 x 446 x 484 mm	330, standard
	26.7" x 25.4" x 19.1"	330, model with portion scale
Electrical data		
Power consumption	230 V; 50 Hz; 1.6 A	Single-phase alternating current
IP rating	IP33	
Performance data		
Product size	Width 260 mm	330, standard
	10.2"	
	Height 180 mm	
	7.1"	
	Round Ø 225 mm	
	8.9"	
Blade diameter	330 mm	
	13.0"	
Blade speed	280 rpm	
Blade alignment	0° inclination	
Slice thickness	0-24 mm	Infinitely adjustable
	0-0.94"	
	0-3 mm	Fine adjustment
	0-0.1"	
Slicing performance	-	
Carriage angle	0°	
Housing material	Anodized aluminum	
	Plastics	
Weight		
Machine weight	approx. 46 kg	
	101.4 lb	
Packaging data		




Dimensions L x W x H	830 x 745 x 700 mm 32.7" x 29.3" x 27.6"
Packaging weight	approx. 55 kg 121.3 lb

Options	Facts	Details
Integrated portion scale	0-3,000 g 0-6 lb 2 g 0.005 lb	Weighing range Interval

Symbols



Dimensional drawings

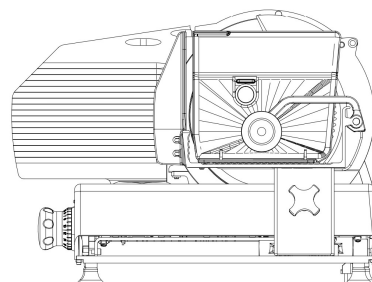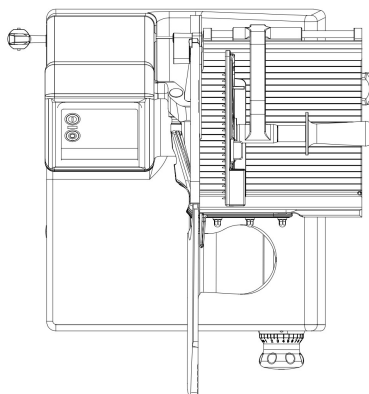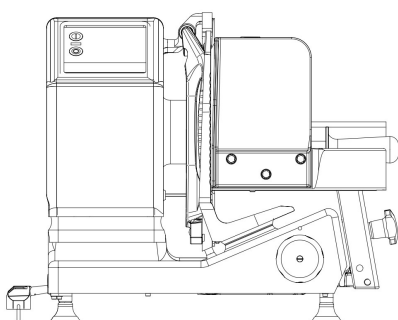

Bizerba SE & Co. KG

Wilhelm-Kraut-Straße 65
72336 Balingen

phone: +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com