

Fact Sheet

BIZERBA

XC II 400 Pro

Modern PC technology in a compact design is what the X-Class II Pro series stands for. Benefit from an integrated 3-in-1 printer. This device allows convenient, intuitive and fast operation via touchscreen. Enjoy more performance due to a large RAM. All models are provided with a powerful Intel® Quad Core processor. Ideally suitable for new features or individual requirements.



More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Color	Anthracite gray	RAL 7016
Operator display	10.1" touch TFT	Resolution: 1,024 x 600 (WSVGA) LED backlit Resistive 5-wire touch technology Infinitely inclinable: adjustable viewing angle
Customer display	No customer display	
	7" TFT	Resolution: 800 x 480 LED backlit
	10.1" TFT	Resolution: 1,024 x 600 (WSVGA) LED backlit
Operating system	Windows 10 IoT	64 bit Windows
	BizLPOS3 OpenSuse® ≥ 42.1 Leap Kernel 4.2	64 bit Linux
Application software	RetailPowerScale	Bizerba scale software, compatible with Retail-Framework products
	RIK (RetailIntegratorsKit)	3rd-party software
Processor	Intel® Celeron® Processor N3160 Quad Core	Clock rate of up to 2.24 GHz
		L2 cache: 2 MB Instruction set: 64 bit Integrated graphics card: Intel® HD Graphics 400
RAM	DDR3	4 GB RAM
Mass storage	SSD	60 GB, optionally 120 GB
Printer	3-in-1: Label, receipt or linerless	Optionally 2" or 3"
	(label, receipt, linerless)	up to 3"/76 mm paper width Clamshell design for easy paper role changing Print speed of up to 100 mm/s
External additional printer	Usage of the Bizerba power supply unit RSP 28 allows to use the following printers of the K-Flex series as external additional printer.	KF 3" receipt / linerless printer
		KF 3" label printer
		KF 2" L Compact receipt / linerless printer
Interfaces	2 x USB 3.0	Super speed
	2 x USB 2.0	High speed
	2 x COM	DSUB, RS232
	LAN	RJ45, GBit LAN
	Cash register drawer connection (COM)	RJ12


Weighing ranges	3/6 kg	Interval 1/2 g, min. 20 g
	6/15 kg	Interval 2/5 g, min. 40 g
Temperature range	-10 °C to +40 °C	
Power consumption	In stand-by 2.4 W	Energy saving thanks to use of Wake on LAN
	During operation typically 20.3 W	
Net weight of device	XC II 400 Pro	approx. 12 kg

Options	Facts	Details
Software extensions	RetailApps Software modules: Cash register, scanning, e-cash, inventory, delivery note, proof of origin, time registration, video journal, Retail-Connect	Extra software function per RetailApps Extra software functions per module
WLAN modules	BWLC	Bizerba Wireless LAN Client
		802.11 a/b/g max. 54 MBit/s
	USB	USB WLAN stick, no floating sales mode possible
		802.11 a/b/g/n max. 300 MBit/s


Info graphics




Dimensional drawings

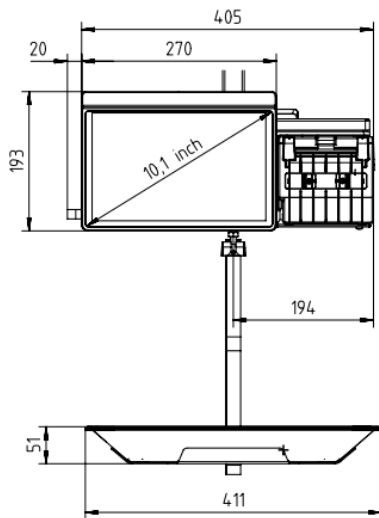

XC II 400 Pro operator side

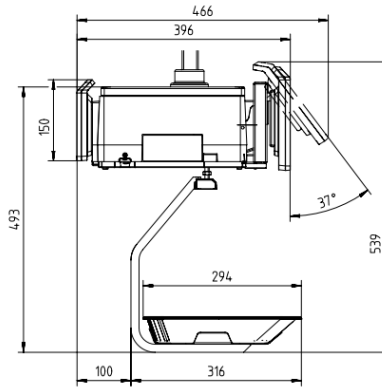

XC II 400 Pro side view

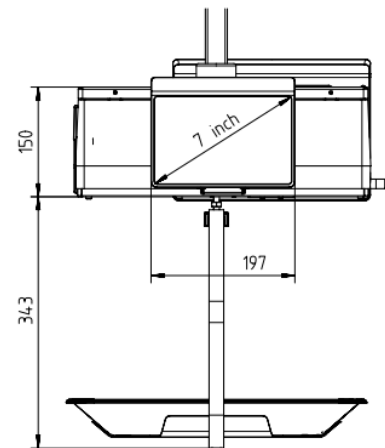

XC II 400 Pro customer side

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

phone: +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com