

Fact Sheet

iS65 G3

BIZERBA

The powerful industrial PC iS65 is designed for continuous operation in demanding industrial environments. It reliably supports you in terms of machine control or as an operating unit in intralogistics.




More information
High performance
with a wide range of
solutions and options.

Specifications	Facts	Details
Housing	Stainless steel	V2A back panel
IP rating	IP65 Rubber cable bushing to protect all interfaces	Dust and water proof
Ambient temperature	0 °C to +40 °C	Operation
Display	15.6" LCD TFT display	Resolution: 1,366 x 768 px
Touch screen	Projected Capacitive Touch	Use in moderate industrial environments
Processor	Intel Atom E3950	1.6 GHz; Quad Core (burst frequency up to 2.0 GHz)
Working memory	8 GB	DDR3 RAM
Data storage	128 GB	SSD Solid-State-Drive
Operating system	Windows 10 IoT Enterprise	Version 2021 (end of service 01.2032) The Microsoft license terms apply: https://www.microsoft.com/en-us/Useterms/Retail/Windows/10/UseTerms_Retail_Windows_10_English.htm
Interfaces	4 x USB 2 x Ethernet 1 x serial port	USB 3.0 RJ45, 10/100/1,000 Mbit RS232 (D-sub 9 pin), 5V voltage supply for connected external scanner via selector Please note: via the rubber bushings (IP65) max. 5 interface cables can be routed outwards.
WLAN	WLAN internal wireless module	IEEE 802.11 a/b/g/n/ac externe Antennen für bestmöglichen Empfang
Mounting system	VESA 75	Mounting bracket
Mains supply	DC IN 24 V DC	Wide range 19 - 29 V DC Power consumption 1.7 A
Options	Facts	Details
Device holder	Table stand Column Wall retaining unit	
Weighing technology	not integrated, possible via WM-T	


Info graphics



Symbols

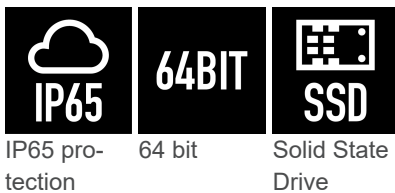

Dimensional drawings

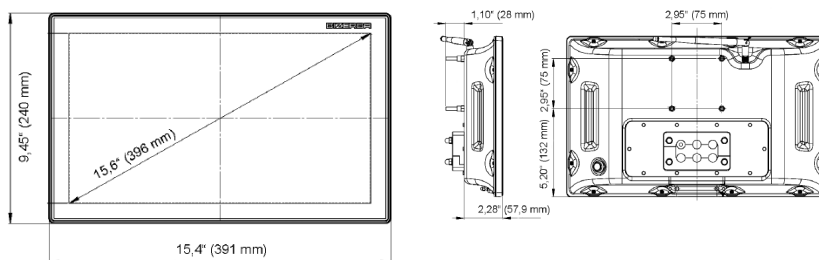

Bizerba SE & Co. KG
Wilhelm-Kraut-Straße 65
72336 Balingen

T +49 7433 12-0
fax: +49 7433 12-2696
marketing@bizerba.com

www.bizerba.com